



## Phase Sequence Relay BA 9041, AI 941 N VARIMETER

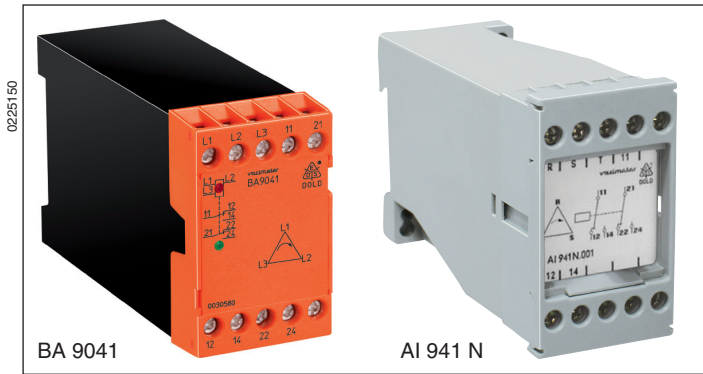


- According to IEC 255, EN 60 255, VDE 0435 part 303
- Detection of wrong phase sequence
- 1 or 2 changeover contacts
- Width 45 mm

### Function Diagram

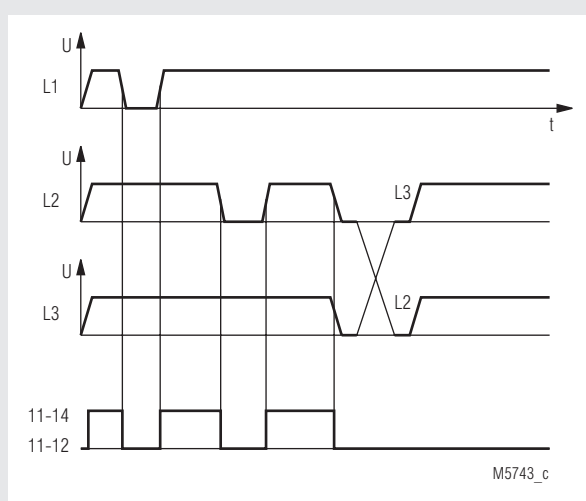

### Circuit Diagram



BA 9041, AI 941 N.002

### Approvals and Marking



### Application

Monitoring three-phase mains for incorrect phase sequence

### Function

The phase sequence relays BA 9041 and AI 941N monitor the right order of the phases in a 3-phase system. When all 3 phases are connected to the device and the phase sequence is correct the output contacts are activated, 11-14 and 21-24 close and a green LED comes on.

When the voltage in one phase drops below 60 % of the nominal voltage the relay is de-energized. If a load feeds back a voltage that is higher than 60 %  $U_N$ , the fault is not detected. To avoid this problem an asymmetry relay BA 9040 should be used.

In systems with commutation peaks (thyristor controlled drives) the device can falsely detect a phase failure.

In this case it is helpful to know as much as possible about the actual conditions in the system.

### Technical Data

#### Input

<b>Nominal voltage <math>U_N</math>:</b>	3 AC 190, 230, 400, 415, 440, 500 V
<b>Voltage range:</b>	0.8 ... 1.1 $U_N$
<b>Nominal frequency of <math>U_N</math>:</b>	50 Hz (60 Hz on request)
<b>Frequency range:</b>	± 5 %
<b>Nominal consumption:</b>	< 3.5 VA

#### Output

#### Contacts

AI 941 N.001:	1 changeover contact
AI 941 N.002, BA 9041:	2 changeover contacts
<b>Operate-/release delay:</b>	< 100 / < 50 ms
<b>Thermal current <math>I_{th}</math>:</b>	5 A
<b>Switching capacity</b>	
to AC 15	
NO contact:	3 A / AC 230 V IEC/EN 60 947-5-1
NC contact:	1 A / AC 230 V IEC/EN 60 947-5-1
<b>Electrical life</b>	
to AC 15 at 3 A, AC 230 V:	2.5 x 10 <sup>5</sup> switching cycles
<b>Short-circuit strength</b>	
<b>max. fuse rating:</b>	4 A gL IEC/EN 60 947-5-1
<b>Mechanical life:</b>	50 x 10 <sup>6</sup> switching cycles

## Technical Data

### General Data

<b>Operating mode:</b>	Continuous operation	
<b>Temperature range:</b>	- 20 ... + 60°C	
<b>Clearance and creepage distances</b>		
rated impuls voltage / pollution degree:	4 kV / 2	IEC 60 664-1
<b>EMC</b>		
Electrostatic discharge:	8 kV (air)	IEC/EN 61 000-4-2
HF irradiation:	10 V/m	IEC/EN 61 000-4-3
Fast transients:	2 kV	IEC/EN 61 000-4-4
Surge voltages between wires for power supply:	1 kV	IEC/EN 61 000-4-5
between wire and ground:	2 kV	IEC/EN 61 000-4-5
Interference suppression:	Limit value class B	EN 55 011
<b>Degree of protection:</b>	Housing: IP 40	IEC/EN 60 529
	Terminals: IP 20	IEC/EN 60 529
<b>Housing:</b>	Thermoplastic with V0 behaviour according to UL subject 94	
<b>Vibration resistance:</b>	Amplitude 0.35 mm, IEC/EN 60 068-2-6 frequency 10 ... 55 Hz	
<b>Climate resistance:</b>	20 / 060 / 04	IEC/EN 60 068-1
<b>Terminal designation:</b>	EN 50 005	
<b>Wire connection:</b>	2 x 2.5 mm <sup>2</sup> solid or 2 x 1.5 mm <sup>2</sup> stranded wire with sleeve DIN 46 228-1/-2/-3/-4	
<b>Wire fixing:</b>	Flat terminals with self-lifting clamping piece IEC/EN 60 999-1	
<b>Screw mounting:</b>	AI 941 N: 35 x 50 mm and 35 x 60 mm	
<b>Mounting:</b>	DIN rail IEC/EN 60 715	
<b>Weight:</b>	BA 9041: 310 g	
	AI 941 N: 300 g	

### Dimensions

#### Width x height x depth

BA 9041:	45 x 74 x 124 mm
AI 941 N:	45 x 77 x 127 mm

### Standard Types

BA 9041 AC 400 V 50 Hz		
Article number:	0041732	stock item
• Output:	2 changeover contacts	
• Nominal voltage U <sub>N</sub> :	AC 400 V	
• Width:	45 mm	
AI 941N.001 AC 400 V 50 Hz		
Article number:	0040771	stock item
• Output:	1 changeover contact	
• Nominal voltage U <sub>N</sub> :	AC 400 V	
• Width:	45 mm	

### Variant

AI 941 N. ___ /03:	Nominal frequency 50 ... 60 Hz, phase failure cannot be detected with this unit
--------------------	---

### Ordering example for variants

BA 9041	AC 400 V	50 Hz	
			Nominal frequency
			Nominal voltage
			Type

AI 941 N	.001	/ _ _	AC 400 V	50 Hz	
					Nominal frequency
					Nominal voltage
					Variant, if required
					Contacts
					Type